


OAB908 SERIES



AC Side-inlet blower - Dual Speed
183x190x70mm (7.2"x 7.5"x 2.8")

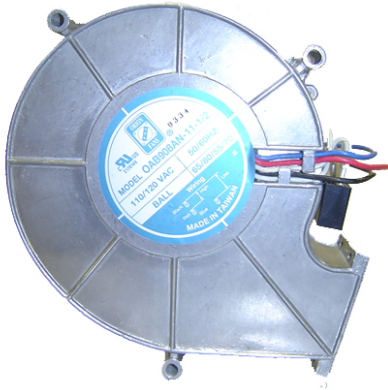

MOTOR
4-pole or 2-pole capacitor motor. Impedance and thermally protected. Tachometer available.
DIELECTRIC STRENGTH
1500VAC / 1 min., 0.5mA

FRAME
Diecast Aluminum
IMPELLER
PBT, UL94V-0 Thermoplastic
POWER CONNECTION
3x lead wires 300mm (12").

OPERATING TEMPERATURE
-30C ~ +85C

LIFE EXPECTANCY
60,000 hours

PART NUMBER	OAB908AN-11-1/2	OAB908AN-22-1/2
NOMINAL VOLTAGE	120VAC	220VAC
VOLTAGE RANGE	100 ~ 125VAC	200 ~ 240VAC
INPUT POWER (WATTS)	65 W / 45 W	65 W / 45 W
RATED SPEED (RPM)	3100 / 2400	3100 / 2400
AIRFLOW (CFM)	100 / 75	100 / 75
NOISE LEVEL (DB)	68 / 55	68 / 55
MAX. STATIC PRESSURE (iH2O)	0.9 / 0.7	0.9 / 0.7
BEARING TYPE	Sealed Dual Ball	Sealed Dual Ball

